


NOTES:

1. SEE O&M FOR REQUIRED INSTALLATION CLEARANCES.
2. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
3. DIMENSIONS ENCLOSED IN [] ARE IN MM.

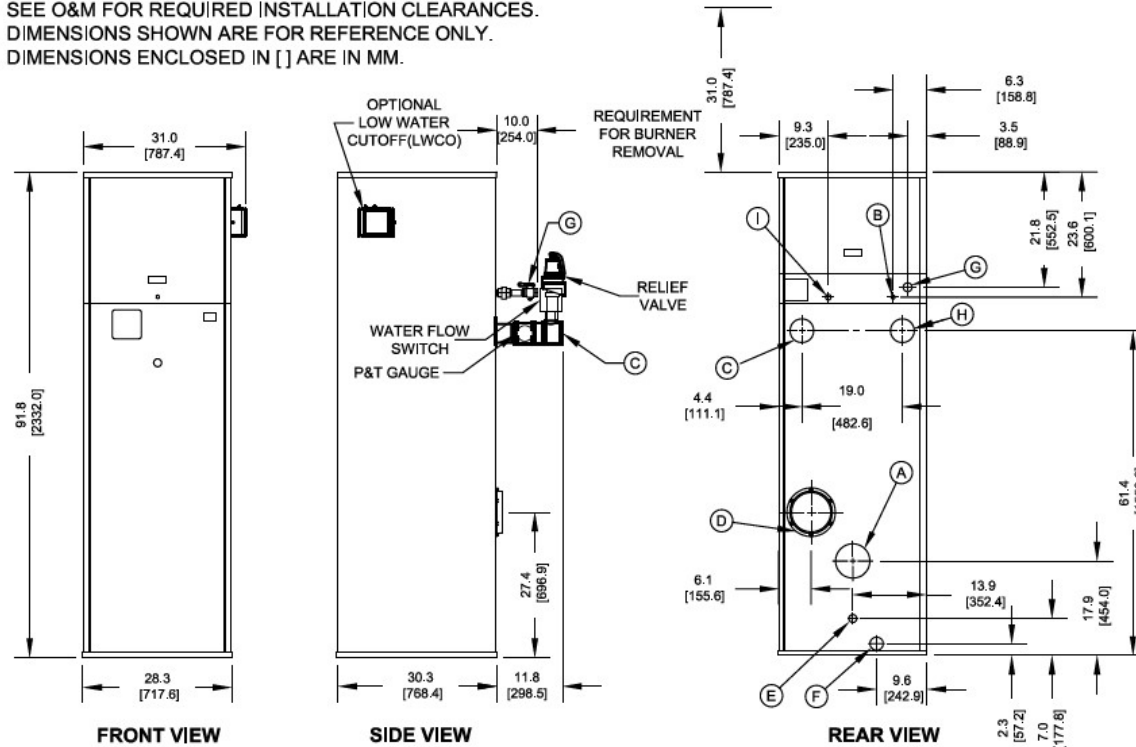

KEY	DESCRIPTION	
A	Flue Outlet	6" [152.4] Diameter (AL29-4C SS)
B	Factory Installed Pilot Gas Li	1/4" [6/4] O.D. Tube
C	Water Supply to System	3" NPT
D	Inlet Air	8" [203.2] Diameter
E	Drain, Startup Condensate	5/8" [15.9] O.D. Tube SS
F	Appliance Drain	1" NPT
G	Gas Supply	1 1/2" NPT
H	Water Return from System	3" NPT
I	Optional Gas Train Vent	3/4" NPT (D.B.&B & D.B.&B w/ POC Only)

NOTES:

1. SEE O&M FOR REQUIRED INSTALLATION CLEARANCES.
2. DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
3. DIMENSIONS ENCLOSED IN [] ARE IN MM.



Submittal Data Sheet

RATINGS AND CAPACITIES

Input (MBH):	2,000,000	BTU/HR
Output (MBH):	1,760,000	BTU/HR
Boiler Horsepower:	52.6	BTU/HR
Thermal Efficiency:	88.0%	BHP
Heating Surface:	352	Sq.Ft.
Water Content:	18.5	Gallons
Fuel:	Natural Gas or LP Gas	
Firing Rate:	Reliable Modulation	
Burner Turndown:	3:1	
Low NOx Emissions:	<10 ppm	
Inlet Gas Pressure (NG):	See Chart at right	
Inlet Gas Pressure (LP):	See Chart at right	

* This data supercedes data found on Table 3 of I&O Manual, per PRODUCT UPDATE issued June 6, 2024.

Shipping Weight, Approximate: **1,461** lbs

ASME Section IV (Max 160 PSIG / 210°F)

Setpoint range is 145-190°F

Adjustable, manual reset high limit setting of ≤ 200°F.

ASME HLW stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)

UL Certified to ANSI Z21.10.3/CSA 4.3



DIMENSIONS / CONNECTIONS

Height:	91 3/4"	(Note 1)
Width:	28 3/8"	(Note 2)
Length:	30 3/8"	(Note 3)
Supply Connection:	3"	
Return Connection:	3"	
Vent / Air Intake Connections:	6" Vent	8" Intake
Condensate / Appliance Drain Connection:	5/8" Condensate Tube	1" NPT Drain
Gas Connection:	1 1/2"	

NOTES:

1. Height dimension is from floor to top of jacket.

2. Length is from jacket front to jacket rear.

3. Dimensions shown are for reference only

FLows AND PRESSURE DROPS

Delta T	Flow (GPM)	ΔP (Ft. Hd)
20°F ΔT	170 (Max)	13.27
40°F ΔT	85 (Min)	3.32

Electrical Supply Options

☐	120v/60hz/1ph (Standard)	7.5 amps
☐	208v/60hz/1ph	6.6 amps
☐	230v/60hz/1ph	6.4 amps
☐	208v/60hz/3ph	6.0 amps
☐	230v/60hz/3ph	6.0 amps
☐	460v/60hz/3ph	3.0 amps

Blower Motor (hp)

1-1/2

Relief Valve Options

☐	125 psi (STANDARD)
☐	150 psi (OPTIONAL)

Inlet Gas Pressure

SIZE	Nat. Gas Min. ("w.c.)	LP Min. ("w.c.)	Max
500	5.0" w.c.	8.0" w.c.	14.0" w.c.
750	7.0" w.c.*		
1000	7.0" w.c.*		
1500	7.0" w.c.*		
2000	9.0" w.c.*	9.0" w.c.	
2000s	7.0" w.c.	8.0	
2500	6.0" w.c.		
3000	6.0" w.c.		

* NOTE: Optional natural gas train with 4" w.c. minimum inlet gas pressure
ONLY AVAILABLE on sizes 750, 1000, 1500 & 2000.

Submittal Data Sheet

STANDARD EQUIPMENT

PRESSURE VESSEL DESIGN

Copper Fin-tube construction
Bronze header design
Gasketless heat exchanger
ASME Section IV certified "H" stamp
MAWP 160 PSI & max design temp 250°F
5-year heat exchanger warranty
20-year thermal shock warranty

COMBUSTION DESIGN

Maintenance-free ceramic burner
Ultr-low NOx emissions (<10ppm)
Whisper quiet operation (<50 dBA)
Easy to service, 99% efficient industrial air filter
Industrial cast aluminum blower assembly
VFD Driven Blower
Reliable electric spark-to-pilot ignition
10-year burner warranty
Honeywell UV-Scanner

VENTING

Sealed or room air combustion
Direct vent (sidewall or vertical) (Cat IV)
Conventional venting (Cat II)
NOTE: This is NOT a Cat 1 Vent appliance.

BOILER EQUIPMENT

Siemens RWF55 operating control
High limit w/ manual reset safety temperature control
Water flow switch
Low water cut-off with manual reset safety controller
Outlet temperature sensor
Combustion air switch
Pressure and temperature gauge
Safety relief valve (Optional pressure 30 - 150 PSI; See details above.)

Single point electrical supply: (Available in: 1 and 3 phase options. See details above.)

BURNER EQUIPMENT

UL/FM/CSD-1 gas train
Reliable Turndown
Natural or LP gas
Pilot gas valve / Pilot gas regulator
Siemens SKP-75 gas valve
Low and high gas pressure switches with manual reset

SIEMENS RWF55 OPERATING CONTROL FEATURES

Adjustable set point
Remote set point (0-10v or 4-20 mA)
Outdoor air temperature reset

IMPORTANT NOTE: For installation and operation only in climates where the ambient temperature will not be less than 32 °F (0 °C). Appliance must be protected from standing water. Install on a level platform. Do not install this appliance under an overhang less than 3 feet from its top. The area under the overhang must be open on 3 sides. Never install directly on carpeted flooring.

OPTIONAL EQUIPMENT

- ☐ Low gas pressure venturi, 4" wc (AVAILABLE ONLY on Models 750-2000) [FACTORY INSTALLED OPTION ONLY]
- ☐ Line Reactor Adds voltage / spike protection for the blower's VFD. (*Highly recommended for areas with dirty voltage.*)
- ☐ Honeywell 7800 Series display with ModBus Module
Line Reactor Adds voltage / spike protection for the blower's VFD. (*Highly recommended for areas with dirty voltage.*)
- ☐ Outdoor Air Sensor
- ☐ Condensate neutralizer:
 - ☐ 850 MBH ☐ 1,200 MBH
 - ☐ 2,000 MBH ☐ 5,000 MBH
- ☐ Pump Kit (Boiler Circulation Pump, Pump Flange Kit Sized based on a 20°F Delta T)
- ☐ Annual Maintenance Kit
- ☐ System Temperature Sensor
- ☐ ModBus RS485 communication for Siemens RWF55 and Honeywell Flame Safeguard Control (Boiler to BMS System)
- ☐ Universal comms. gateway (BACnet MS/TP, BACnet/IP, N2, Modbus TCP)
- ☐ Local / remote switch
- ☐ Alarm bell with silencing switch
- ☐ Relays: ☐ General Alarm ☐ Boiler Status
- ☐ Conductor Sequencing Panel: Req. for multiple EVA applications without BMS. Contact your RSM with Questions.)

The Conductor Sequencing Panel manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.

Extended Warranty Options Available:

	<u>3-Year</u>	<u>5-Year</u>	<u>10 Year</u>
<u>Parts Only</u>	☐	☐	☐
<u>Parts and Labor</u>	N/A	☐	☐