




Dual Fuel DHW Submittal Data Sheet

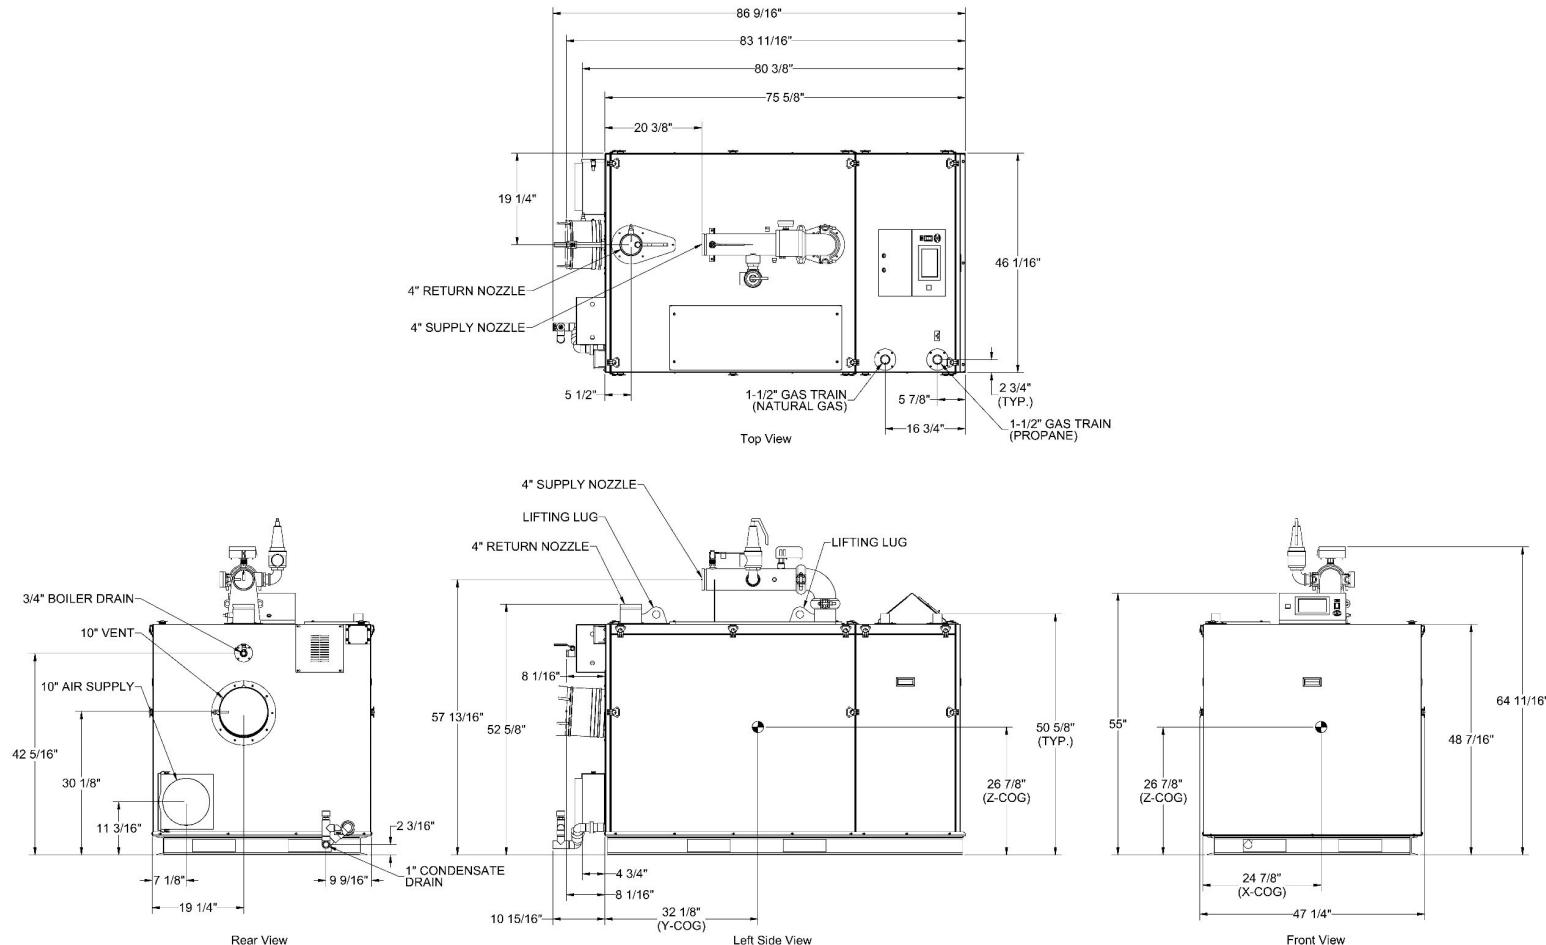

PO BOX 3244 | LANCASTER, PA 17601

AMPW-2500 DF
Dual Fuel

**INNOVATIVE EQUIPMENT FOR
HOT WATER SYSTEMS**
WWW.THERMALSOLUTIONS.COM

Updated 10/31/2025

ABCPV-20251001



Dual Fuel DHW SUBMITTAL DATA SHEET

RATINGS AND CAPACITIES		
Input - Low fire:	500,000	BTU/HR
Input - High Fire:	2,500,000	BTU/HR
Output - High Fire:	2,425,000	BTU/HR
Boiler Horsepower:	72.4	BHP
Thermal Efficiency:	97.0%	
Low Fire Thermal Efficiency:	Up to 99%	
Heating Surface:	301	Sq.Ft.
Water Content:	34.6	Gallons
Fuel:	Natural Gas or LP Gas	
Firing Rate:	Full Modulation	
Burner Turndown:	5:1	
Low NOx Emissions:	< 10 ppm	
Inlet Gas Pressure (NG):	4" wc	Min.
Inlet Gas Pressure (LP):	8" wc	Min.
	14" wc	Max.
Shipping Weight, Approximate:	2,038	Ibs
ASME Section IV (Max 160 PSIG / 210°F)	  	
Setpoint range is 60-185°F		
Adjustable, manual reset high limit setting of ≤ 200°F.		
ASME HLW stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)		
ETL Certified to ANSI Z21.13 / CSA 4.9		
ETL Certified to UL 795 / CSA 3.1		

FLOWS AND PRESSURE DROPS		
Delta T	Flow (GPM)	Head Loss (ft)
20°F △ T	242	15.4
30°F △ T	161	8.9
40°F △ T	121	6.1

Electrical Requirements: (Appliance Only)						
Model	Voltage	Phase	Hz	Max. Amp Draw		
1000-1250	120	1	60	11		
	208			7.4		
	240			6.5		
1500-2500	120	1	60	13.5		
	208			8.2		
	240			7.7		
	208	3	60	11		
	240			9.9		
	480			6.4		
3000	208	1	60	14.1		
	240			12.6		
	208	3	60	9.9		
	480			6.4		
3500-4000	208	3	60	11		
	240			9.9		
	480			6.4		
NOTES:						
1. Height dimension is from floor to top of jacket.						
2. Length is from jacket front to jacket rear.						
3. Dimensions shown are for reference only						
4. Refer to manual for gas supply piping charts						

DIMENSIONS / CONNECTIONS		
Height:	54 7/8"	(Note 1)
Width:	47 1/4"	(Note 2)
Length:	75 5/8"	(Note 3)
Supply Connection:	4" Grooved	
Return Connection:	4" Grooved	
Vent / Air Intake Connections:	10"	
Condensate / Boiler Drain Connection:	1"	
Gas Connection (NG):	1 1/2" NPT	
Gas Connection (LP):	1 1/2" NPT	



Dual Fuel DHW SUBMITTAL DATA SHEET

STANDARD EQUIPMENT

PRESSURE VESSEL DESIGN

Stainless Steel Heat Exchanger
ASME Section IV Certified, "HLW" Stamp
MAWP 160 PSIG & Max Temp 210°F
Setpoint range is 60-185°F
Adjustable, manual reset high limit setting of ≤ 200°F.
ASME H stamp MAWT is 210°F for the vessel. (For max setpoint, see Setpoint range.)

Ten Year Limited Pressure Vessel Warranty

COMBUSTION DESIGN

Stainless Steel Pre-Mix Burner	Zero governor gas valve
Low NOx Emissions (< 10 ppm)	Variable Speed Combustion Blower
Full Modulation, 5:1 Turndown	Air Proving Switch
Natural Gas, Propane or Dual Fuel (Gas/Gas)	Blocked Vent Switch
4" wc (8" wc Propane) to 14" wc inlet gas pressure	Manual fuel changeover switch (Dual Fuel Only)
High/Low gas pressure switches, manual reset	Direct Spark Ignition System with UV Scanner

VENTING

Category II or IV Venting
Individual or Common (Engineered) Vent System
Vertical or Horizontal
CPVC, PP or SS Venting *Materials Acceptable
Combustion Air Intake - Sealed or Room

APPLIANCE EQUIPMENT

Concert™ Control (24 Vac)	Water Flow Switch
High Limit Temp Control, Manual Reset	Condensate trap
Low water cutoff, manual reset	Blocked Condensate Switch
Supply & Return Water Temperature Sensors	Pressure & Temperature Gauge
AMSE 150 PSE Relief Valve Standard	Flue Gas Temperature Sensor

ELECTRICAL DESIGN

Models 1000-2500:

- 120-208-230VAC/60HZ/1PH - High Voltage
(1500 to 2500 - Optional 208-230-460VAC/60HZ/3PH)

Models 3000:

- 208-230-240VAC/60HZ/1PH - High Voltage
- 208-230-240-460VAC/60HZ/3PH - High Voltage

Models 3500-4000:

- 208-230-240-460VAC/60HZ/3PH - High Voltage
- PCB (Printed Circuit Board) Fused Connections

24VAC/5VDC - Low Voltage PCB

- EMS Communications
(Dual RJ45 Jacks for Peer-To-Peer or ModBus)
- Boiler Options (Sensors)
- Pumps (Boiler, DHW, System) & Auxiliary Devices

* Flue system material shall be capable of continuous operation at 210°F or higher and shall be certified to UL 1738 – venting system for gas-burning appliances cat II, III and IV.



Dual Fuel DHW SUBMITTAL DATA SHEET

OPTIONAL EQUIPMENT

- Hydronic Kit (Boiler Circulation Pump, Pump Flange Kit and Condensate Neutralizer)
- External High Limit Temperature Control, Manual Reset
- Condensate Neutralizer
- Supply Header Temperature Sensor: Direct Immersion Well Immersion (with Well)
- Outdoor Air Temperature Sensor (Wired)
- EMS Signal Converter Kit (Converts Energy or Building Management System 0-10v signal to 4-20mA)
- Motorized Isolation Valves
- Alarm Buzzer with Silencing Switch
- Gas Valve Proving Switch
- Vent Adapter - CPVC
- Universal Communications Gateway (BACnet, Metasys, Modbus or Lonworks)
- Stackable Rack
- Conductor Sequencing Panel

The Conductor manages multiple condensing & non-condensing, small & large heat output, new and/or existing boilers (full modulation or on-off), and steam or hot water applications. It helps improve system efficiency by selecting and modulating the right boiler to match operating conditions. The Conductor offers a single point boiler plant Energy Management System (EMS) interface including Modbus TCP/IP, Modbus RTU RS485, BACnet/IP and BACnet MSTP standard. If Lonworks needed, add for the separate Lonworks gateway.

EXTENDED WARRANTY

- 3-Year Parts
- 5-Year Parts
- 10-Year Parts
- 5-Year Parts/Labor
- 10-Year Parts/Labor



Dual Fuel DHW Submittal Data Sheet

CONCERT CONTROL FEATURES



Dashboard - Color Touchscreen Display, 4"

Intuitive Icon Navigation

"Quick" Setup Menus

*Real Time BTU/H Display

Two (2) Temperature Demand Inputs

Outdoor Air Reset Curve for Each Input

Time of Day Setback Capability

(Enviromat Thermostat must be installed)

Three (3) Pump Control

Boiler Pump With On/Off or Variable Speed Control

Domestic Hot Water (DHW) Pump

System Pump

Alternative Control to Combustion

Air Damper or Standby Loss Damper

Pump Overrun for Heat Dissipation

Pump Exercise

Pump Rotor Seizing Protection

Peer-to-Peer Boiler Communications

Multiple Size Boiler Sequencing Up to 8 Units

*Two (2) Boiler Start/Stop Trigger

Lead Boiler Automatic Rotation

Energy Management System (EMS) Interface

*Firing Rate and Water Temperature Based

Algorithms for Multiple Boilers; loss of EMS
signal defaults to local boiler settings

420mA Input/Output (010Vdc Optional Converter)

ModBus Input/Output (BACnet or LonWorks Optional Gateway)

Simultaneous Interface with Peer-to-Peer

USB Data Port Transfer

USB Data Port Transfer

Download Parameters for Troubleshooting

Import Data into .CRV Formatted Files for Performance Analysis



Energy Efficiency Enhancer

AntiCycling Technology

Multipler boiler base load common rate

Outdoor Air Temperature Reset Curve

Warm Weather Shutdown

Boost Temperature & Time

Ramp Delay

OverTemperature Safeguarding

Self-Guiding Diagnostics

Identifies Fault

Describes Possible Problems

Provides Corrective Actions

Time/Date Stamp on Alarms and Lockouts

Unmatched Archives

Historical Trends Collects Up to 4 months Data

Event History Up to 3000 Alarms, Lockouts and Cycle & Run Times

Alarm Limit String Faults, Holds, Lockouts and Others

Cycle & Run Time Boilers & Pumps

Resettable (Lockouts/Alarms/Cycles & Run Time)

Domestic Hot Water Priority

DHW Tank Piped With Priority in the Boiler Loop

DHW Tank Piped as a Zone in the System With the Pumps Controlled by the Concert Control

DHW Modulation Limiting

Status Screens

Sensor Monitoring and Control

Other Features

Factory Default Settings

Three Level Password Security

Frost Protection

Contractor Contacts (Up to 3)

Low Water Flow Safety Control & Indication

Proportion Integral Derivative (PID) Parameters for Central Heat, DWH, Sequencer and Fan

* Unique to Concert